


FPU 側溝 (福岡県規格道路側溝)


側溝本体規格 (縦断用)

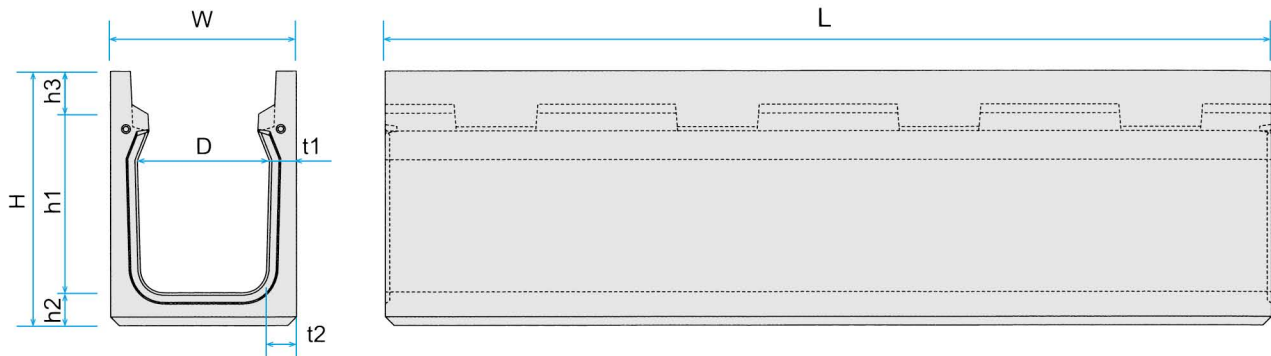

規格	寸 法 (mm)								参考重量 (kg)	
(幅×高さ)	W	D	H	h1	t1	t2	h2	h3	L=1.0m	L=2.0m
250 × 250	370	250	405	250	60	60	65	90	155	315
300 × 300	420	300	465	300	60	60	70	95	185	370
300 × 400	420	300	570	400	60	70	75	95	225	450
300 × 500	420	300	675	500	60	75	80	95	265	530
300 × 600	420	300	775	600	60	80	80	95	300	605
300 × 700	420	300	880	700	60	85	85	95	345	695
300 × 800	420	300	985	800	60	90	90	95	395	790
400 × 400	530	400	590	400	65	65	80	110	260	515
400 × 500	530	400	690	500	65	75	80	110	295	595
400 × 600	530	400	795	600	65	85	85	110	350	700
400 × 700	530	400	900	700	65	90	90	110	395	795
400 × 800	530	400	1005	800	65	95	95	110	445	895
400 × 900	530	400	1115	900	65	105	105	110	515	1035
400 × 1000	530	400	1220	1000	65	110	110	110	570	1145
500 × 500	650	500	710	500	75	75	85	125	350	705
500 × 600	650	500	810	600	75	85	85	125	400	800

側溝本体規格 (横断用)

※受枠は L アングルです。

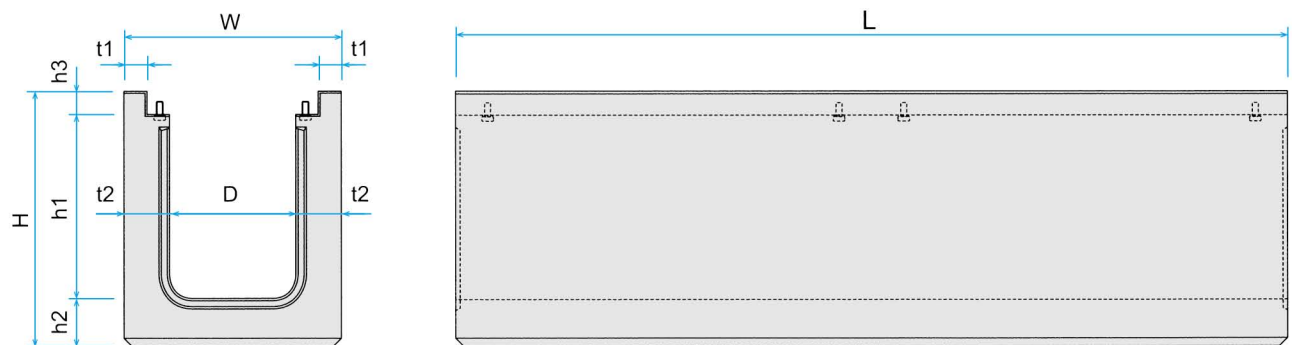

規格	寸 法 (mm)								参考重量 (kg)	
(幅×高さ)	W	D	H	h1	t1	t2	h2	h3	L=1.0m	L=2.0m
250 × 250	460	250	445	290	51	105	105	50	270	540
250 × 300	460	250	495	340	51	105	105	50	295	590
250 × 400	460	250	595	440	51	105	105	50	345	690
250 × 500	460	250	695	540	51	105	105	50	390	785
300 × 300	520	300	510	340	56	110	115	55	330	665
300 × 400	520	300	610	440	56	110	115	55	380	765
300 × 500	520	300	710	540	56	110	115	55	435	870
300 × 600	520	300	810	640	56	110	115	55	485	975
300 × 700	520	300	910	740	56	110	115	55	535	1075
400 × 400	630	400	625	445	61	115	115	65	430	860
400 × 500	630	400	725	545	61	115	115	65	485	970
400 × 600	630	400	825	645	61	115	115	65	535	1075
400 × 700	630	400	925	745	61	115	115	65	590	1185
400 × 800	630	400	1025	845	61	115	115	65	645	1295
400 × 900	630	400	1125	945	61	115	115	65	745	1485
400 × 1000	630	400	1225	1045	61	115	115	65	805	1610