



福岡県規格道路側溝

IPU—電柱廻り

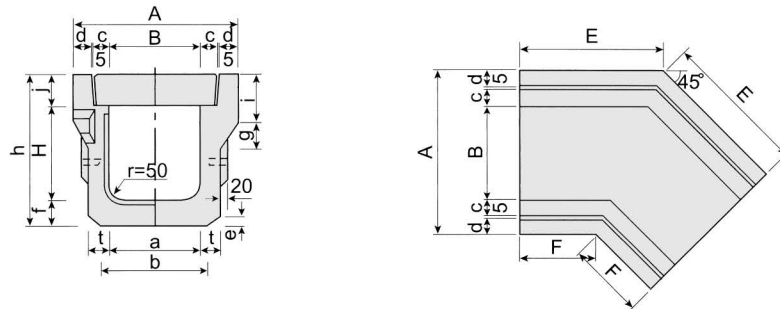


タイプ	寸 法 (mm)																1個当り重量 (kg)
	A	a	B	b	c	d	e	f	g	H	h	i	j	t	E	F	
PU-B300-H300	530	280	300	340	55	55	40	70	90	300	470	150	100	70	464	243	154
PU-B300-H400	530	270	300	330	55	55	40	70	90	400	570	150	100	70	464	243	173
PU-B400-H400	640	370	400	430	55	60	50	80	100	400	595	160	115	80	484	223	211
PU-B400-H500	640	360	400	430	55	60	50	85	100	500	700	160	115	85	484	223	245
許容差	±3	±3	±3	—	—	±3	—	±3	—	±3	±3	—	±3	±3	±3	±3	

IPC蓋

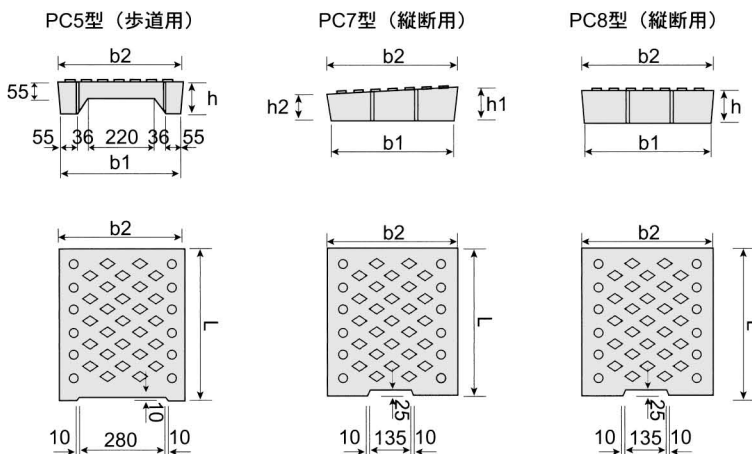


タイプ	寸 法 (mm)						1個当り重量 (kg)
	b1	b2	h	h1	h2	L	
PC5-B300	402	412	100	—	—	497	35
PC7-B300	402	412	—	100	85	497	45
PC7-B400	502	512	—	115	95	497	63
PC8-B300	402	412	100	—	—	497	48
PC8-B400	502	512	115	—	—	497	69
許容差	±3	±3	±3	±3	±3	±3	

IPC—電柱廻り

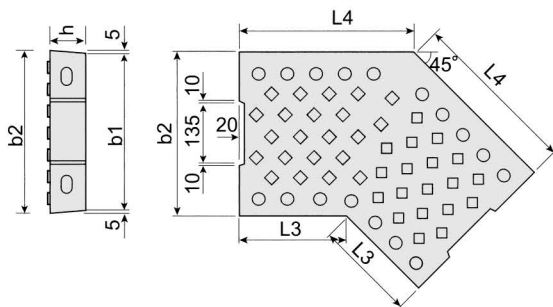

布設平面図

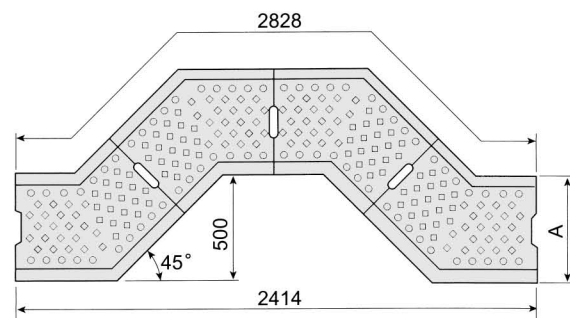

タイプ	寸 法 (mm)					1個当り重量 (kg)
	b1	b2	h	L3	L4	
PC-B300	402	412	100	265	436	68
PC-B400	502	512	115	244	457	98
許容差	±3	±3	±3	±3	±3	