


福岡県規格道路側溝

IPU落蓋側溝

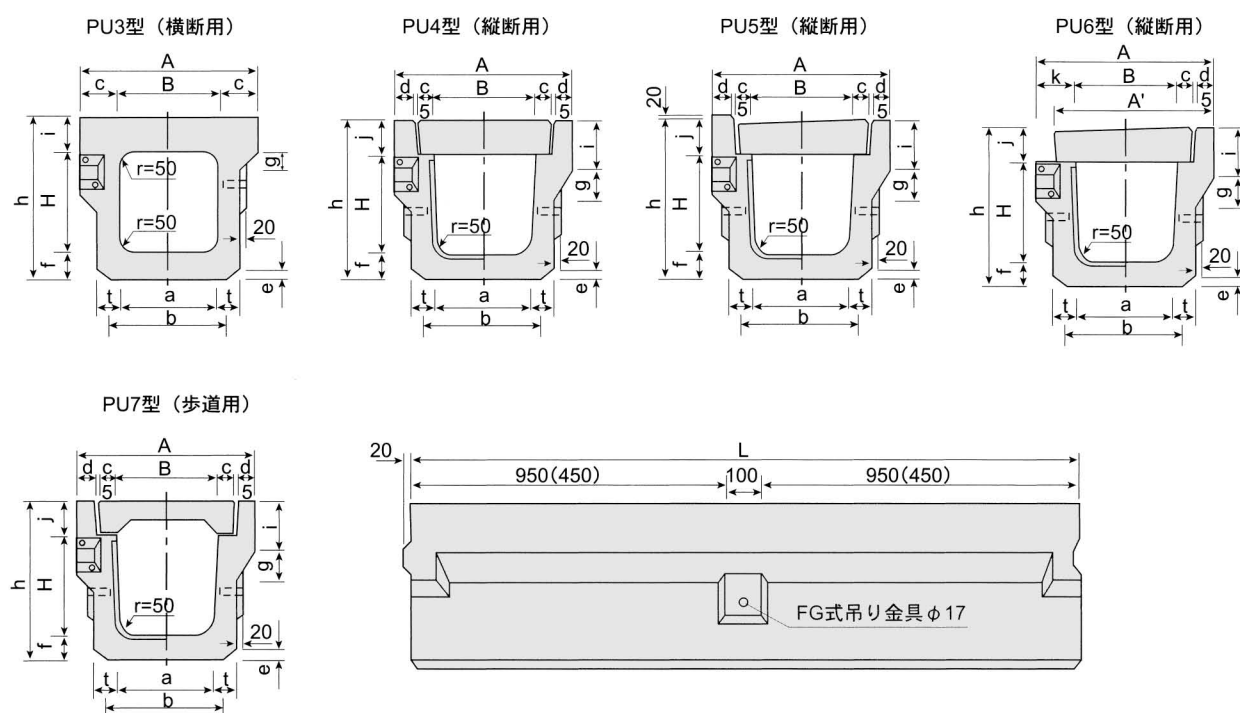

※()内はL=1000

タイプ	寸 法 (mm)																	1個当り重量 (kg)
	A	a	B	b	c	d	e	f	g	H	h	i	j	A'	t	k	L	
PU3-B300-H300	530	280	300	340	115	—	30	80	50	300	480	100	—	—	70	—	2000	625
PU3-B300-H400	530	270	300	340	115	—	30	85	50	400	585	100	—	—	75	—	2000	707
PU3-B400-H400	640	370	400	460	120	—	40	85	70	400	600	115	—	—	85	—	2000	896
PU3-B400-H500	640	360	400	460	120	—	40	90	70	500	705	115	—	—	90	—	2000	993
PU4-B300-H300	530	280	300	340	55	55	40	70	90	300	470	150	100	—	70	—	2000	434
PU4-B300-H400	530	270	300	330	55	55	40	70	90	400	570	150	100	—	70	—	2000	488
PU4-B400-H400	640	370	400	430	55	60	50	80	100	400	595	160	115	—	80	—	2000	597
PU4-B400-H500	640	360	400	430	55	60	50	85	100	500	700	160	115	—	85	—	2000	692
PU5-B300-H300	530	280	300	340	55	55	40	70	90	300	470	150	100	—	70	—	2000	439
PU5-B300-H400	530	270	300	330	55	55	40	70	90	400	570	150	100	—	70	—	2000	493
PU5-B400-H400	640	370	400	430	55	60	50	80	100	400	595	160	115	—	80	—	2000	602
PU5-B400-H500	640	360	400	430	55	60	50	85	100	500	700	160	115	—	85	—	2000	697
PU6-B300-H300	530	280	300	340	55	55	40	70	90	300	470	150	100	472	70	115	2000	406
PU6-B300-H400	530	270	300	330	55	55	40	70	90	400	570	150	100	472	70	115	2000	460
PU6-B400-H400	640	370	400	430	55	60	50	80	100	400	595	160	115	577	80	120	2000	562
PU6-B400-H500	640	360	400	430	55	60	50	85	100	500	700	160	115	577	85	120	2000	657
PU7-B300-H300	510	280	300	360	55	45	20	50	90	300	450	150	100	—	60	—	2000	356
PU7-B300-H400	510	270	300	360	55	45	30	55	90	400	555	150	100	—	65	—	2000	427
許容差	±3	±3	±3	—	—	±3	—	±3	—	±3	±3	±3	±3	—	±3	—	±5	

※ i の許容差 ±3 は PU3 型のみ適用。